


DUO 19441-50

Base Specifications:

50" dia x 5"h x 29" - 96" adj OAH
 04: LED - 49.4 (Dim w/0-10V dim system)
 Opal Acrylic Bottom Diffuser
 Cable hung*

Notes:

04 Lamping: Wattage and Lumens - Initial at the source, no black power cord
 Shown in: CL - Cloverleaf

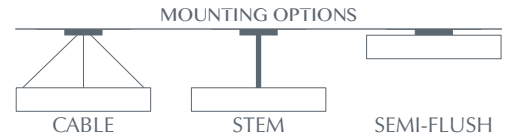

19441-50	-	-	-	-	
MODEL		PERF	FINISH	DIFFUSER	LAMPING

*Modifications:

- Cable hung (Standard)
- Stem mount: ____ OAH
- Semi-flush mount (1" - 1.5" from ceiling to top of fixture)

Other Modifications:

A1 - Angles



CL - Cloverleaf



RD - Round



BA - Bronze Age

- BK - Black
- BP - Black Pearl
- CB - Cast Bronze
- CH - Chestnut
- CR - Chrome
- DI - Dark Iron
- EB - Empire Bronze
- MB - Medieval Bronze
- NB - New Brass
- SB - Smokey Brass
- SP - Satin Pewter
- SS - Smoked Silver

OA - Opal

- 04: Damp / Dry LED - 49.4W - 7755 Lumens - No Black Power Cord
- (Dim w/ Std Phase Dim) - 120V
- (Non-Dim or Dim w/ 0-10V Dim system) - Universal

COLOR TEMPERATURE / CRI

- 3000K (Standard) - CRI available upon request
- 2700K - CRI available upon request
- 3500K - CRI available upon request
- 4000K - CRI available upon request

Project Name:
Project Location:

Specifier Name:
Specifier Location:

Quantity:
Fixture Type: